

DECLARATION OF PERFORMANCE
No.394.00



1. Name and code of the product:

Product: MAXSEAL FLEX -M

Batch: See packaging

2. Name and contact address of the manufacturer or importer or distributor:

Name: DRIZORO, SAU

Contact address: C/Primavera 50-52.P.Ind.Las Monjas. 28850-Torrejón de Ardoz. (Madrid, Spain)

3. Intended use:

CEMENT COATING FOR SURFACE PROTECTION OF CONCRETE. PROTECTION AGAINST INGRESS, MOISTURE CONTROL, AND INCREASING RESISTIVITY.

4. System of assessment and verification of constancy of performance: System 2+

5. Notified body:

Name and identification number: AENOR, 0099

Notified task: Assessment of the Factory Production Control


System of assessment: System 2+

Certificate of the Factory Production Control: 0099/CPR/B15/0010

6. Declared performance

Essential Characteristics	Performance	Harmonised Technical Specification
PERMEABILITY TO CO ₂	S _p > 50 m	EN 1504-2:2004
WATER VAPOUR PERMEABILITY	Class I: S _D < 5 m	EN 1504-2:2004
CAPILLARY ABSORPTION AND PERMEABILITY TO WATER	< 0,1 kg·m ⁻² ·h ^{-0.5}	EN 1504-2:2004
ADHESION	≥ 1,0N/mm ²	EN 1504-2:2004
REACTION TO FIRE	NPD	EN 1504-2:2004
DANGEROUS SUBSTANCES	Comply 5.3	EN 1504-2:2004

- The performance of the product identified in point 1 is in conformity with the declared performance in point 6.
- This declaration of performance is issued under the sole responsibility of the manufacturer, importer or distributor identified in point 2.
- Signed for and behalf of the manufacturer, or importer or distributor by:

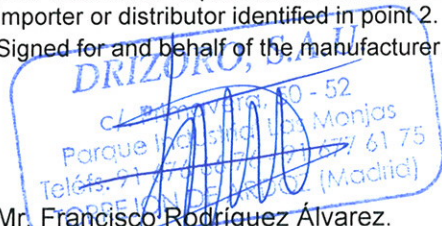

DRIZORO, S.A.U.
 C/ Primavera, 50-52
 Parque Industrial Las Monjas
 Teléfs. 91 676 66 76 - 91 677 61 75
 28850 TORREJON DE ARDOZ (Madrid)

Mr. Francisco Rodríguez Álvarez.
 Director of Quality and Environment.

Torrejón de Ardoz, 24st March, 2014